




UARA. 4000

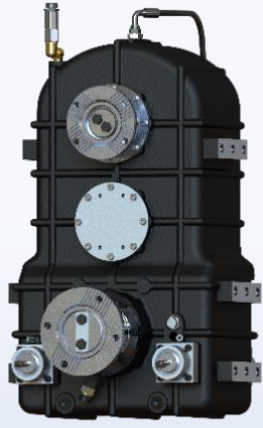


UARA. 3000

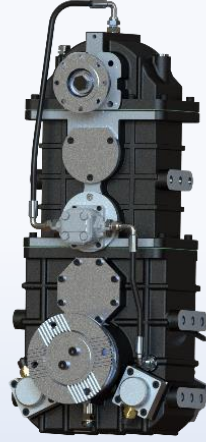

UARA. 2007

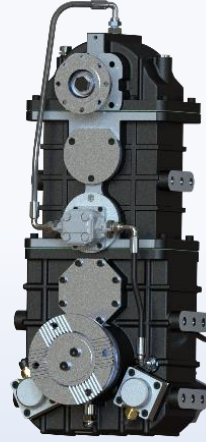

UARA. 2005

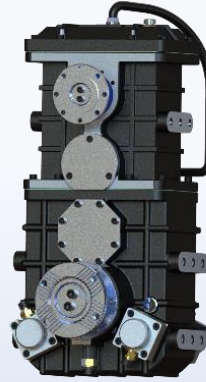

UARA. 2006



UARA. 2002



UARA. 2001




UARA. 805




UARA. 806




UARA. 801

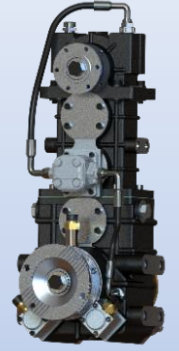

UARA. 401+

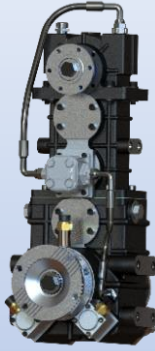

UARA. 401

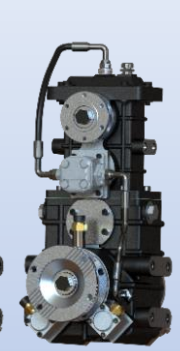

UARA. 404



UARA. 400



UARA. 405

Transfer Cases Property	UARA.405	UARA.400	UARA.404	UARA.401	UARA.401+	UARA.801	UARA.806	UARA.805	UARA.2001	UARA.2002	UARA.2006	UARA.2005	UARA.2007	UARA.3000	UARA.4000
Main Drive Shaft (intermittent)	400 Kgm	400 Kgm	400 Kgm	400 Kgm	450 Kgm	800 Kgm	800 Kgm	800 Kgm	2000 Kgm	2000 Kgm	2000 Kgm	2000 Kgm	3400 Kgm	3000 Kgm	4000 Kgm
Axis / Stage	2	3	4	5	5	3	4	5	3	3	4	5	5	3	3
Distance Between Top Shaft and Bottom Shaft	123 mm	223 mm (1/1.5 Ratio) 214 mm (1/1.8 Ratio)	325 mm	427 mm (1/1.5 Ratio) 418 mm (1/1.8 Ratio)	427 mm (1/1.5 Ratio) 418 mm (1/1.8 Ratio)	270 mm	405 mm	541 mm	270 mm	270 mm	405 mm	541 mm	541 mm	422 mm	422 mm
Top Output Power (Max.)	82 Kw	82 Kw	82 Kw	82 Kw	82 Kw	135 Kw	135 Kw	135 Kw	135 Kw	185 Kw	185 Kw	185 Kw	235 Kw	350 Kw	360 Kw
Top Output Ratio (increaser)	1/1,3 1/1,44	1/1,5 1/1,8	1/1 1,44	1/1,5 1/1,8	1/1,5 1/1,8	1/1 - 1/1.2 1/1.4 - 1/1.6 1/1.84 - 1/2.25	1/1 1/1.7 1/1.97	1/1 - 1/1.2 1/1.4 - 1/1.6 1/1.84 - 1/2.25	1/1 - 1/1.2 1/1.4 - 1/1.6 1/1.84 - 1/2.25	1/1 - 1/1.2 1/1.4 - 1/1.6 1/1.84 - 1/2.25	1/1 1/1.7 1/1.97	1/1 - 1/1.2 1/1.4 - 1/1.6 1/1.84 - 1/2.25	1/1 1/1.7	1/1 - 1/1.3 1/1.6 - 1/1.7	1/1 - 1/1.3 1/1.6 - 1/1.7
Top Output Speed (Max.)	3500 Rpm	3500 Rpm	3500 Rpm	3500 Rpm	3500 Rpm	3600 Rpm	3600 Rpm	3600 Rpm	3600 Rpm	3600 Rpm	3600 Rpm	3600 Rpm	2800 Rpm	2200 Rpm	2200 Rpm
Weight (approx)	48 Kg	65 Kg	76 Kg	85 Kg	89 Kg	128 Kg	165 Kg	175 Kg	135 Kg	138 Kg	170 Kg	180 Kg	185 Kg	250 Kg	265 Kg
Pump & Roll Feature	Ok														
Cooling System (Opsiyonal)	Na	Ok													